



Sustainable Water Resource Planning for Alanda Micro Watershed Using Geospatial Techniques

Sourav Mondal ^{a*}, R. S. Patode ^b, A. R. Mhaske ^a,
V. V. Gabhane ^b, A. R. Tupe ^c and Anita Chorey ^b

^a Department of Soil and Water Conservation Engineering, Dr. Panjabrao Deshmukh Krishi Vidyapeeth, Akola, Maharashtra-444104, India.

^b AICRP for Dryland Agriculture, Dr. Panjabrao Deshmukh Krishi Vidyapeeth, Akola, Maharashtra-444104, India.

^c AICRP on Agrometeorology, Dr. Panjabrao Deshmukh Krishi Vidyapeeth, Akola, Maharashtra-444104, India.

Authors' contributions

This work was carried out in collaboration among all authors. All authors read and approved the final manuscript.

Article Information

DOI: <https://doi.org/10.9734/arja/2024/v17i4523>

Open Peer Review History:

This journal follows the Advanced Open Peer Review policy. Identity of the Reviewers, Editor(s) and additional Reviewers, peer review comments, different versions of the manuscript, comments of the editors, etc are available here: <https://www.sdiarticle5.com/review-history/123874>

Original Research Article

Received: 21/07/2024

Accepted: 23/09/2024

Published: 24/09/2024

ABSTRACT

Groundwater is a vital natural resource, especially in areas lacking surface water bodies. About one-third of the global population relies on it for drinking, irrigation and industrial purposes. However, excessive and unregulated exploitation has led to a rapid decline in water tables, emphasizing the need for sustainable groundwater management. The Alanda micro watershed in Barshitakli Taluka, Akola District, Maharashtra, spans 11.39 km², with a sub-humid climate and

*Corresponding author: E-mail: souravmondal01999@gmail.com;

Cite as: Mondal, Sourav, R. S. Patode, A. R. Mhaske, V. V. Gabhane, A. R. Tupe, and Anita Chorey. 2024. "Sustainable Water Resource Planning for Alanda Micro Watershed Using Geospatial Techniques". *Asian Research Journal of Agriculture* 17 (4):260-67. <https://doi.org/10.9734/arja/2024/v17i4523>.

uneven monsoon rainfall averaging 780 mm. The region faces high water stress in summer, with dried bore wells and farmers relying on rain and groundwater for irrigation. The water resource development plan for Alanda micro watersheds integrates GIS, remote sensing and AHP to identify groundwater potential zones. The Alanda micro watershed soil and water conservation plans were developed using GIS, remote sensing and the AHP method. Thematic maps were overlaid in ArcGIS, applying weighted factors from a pairwise comparison matrix to identify groundwater potential zones. These zones, categorised as high, moderate and low potential, highlight that the largest area has moderate potential, suggesting good opportunities for conservation measures. The survey of the study area identified existing soil and water conservation structures, including 3 farm ponds, 1 check dam and a contour bund. Additional recommendations include 5 farm ponds, 4 check dams, contour trenches and bunding measures, along with agronomic practices for effective surface and groundwater management.

Keywords: Groundwater; watershed; GIS; remote sensing; soil and water conservation.

1. INTRODUCTION

Groundwater is one of the important natural resources that are essential to life and ecological diversity, especially in regions that are devoid of major surfaces of water bodies in the vicinity. The significance of groundwater is evident considering that roughly one-third of the global population relies on it for drinking, irrigation and various domestic and industrial uses [1,2]. Groundwater is a renewable natural resource, but unregulated and excessive use can result in its depletion [3]. The water table is steadily declining at an extremely rapid rate with time because of the non-scientific exploitation of groundwater for various purposes, particularly in regions with fresh groundwater reserves [4]. Hence, the accurate delineation and sustainable management of groundwater are essential to meet growing demands, ensuring its availability not only for the present generation but also for future ones [3]. Water resource management planning considers the various competing demands for water and aims to distribute it equitably to meet all needs and requirements. Agriculture is the backbone of Maharashtra's economy, which is primarily based on this sector. It is the main livelihood for the state's population, with both food and cash crops cultivated. The total irrigated area utilized for crop cultivation in Maharashtra covers 33,500 Sq. Km. [5]. The study area has experienced a rise in water demand, primarily met through the exploitation of groundwater resources. Also, the groundwater quality is deteriorating all over the regions in India [6]. Therefore, creating a sustainable groundwater management plan is essential to ensure the efficient use of these critical resources. This requires the delineation of groundwater potential zones using remote sensing data [7]. Surface water bodies such as

streams, tanks, check dams and ponds act as groundwater recharge zones within the study area [8,9].

1.1 Study Area

The watershed chosen for the research work is the Alanda micro watershed which lies in Barshitakli Taluka of Akola District in Maharashtra. The watershed is located between 20°36' to 20°38' N latitude and 77°03' to 77°05' E longitude. The total geographic area of the watershed is 11.39 km². The watershed is characterized by sub humid to humid climate with rainfall received mostly during the monsoon months of June to September. The area receives an average rainfall of about 780mm [10]. The temperature of the area ranges between 30°C to 42°C during summer while the temperature ranges between 13°C to 28°C during the winter season. The distribution of the rainfall in the monsoon season is uneven and erratic marked by prolonged rainless days. The study area location map is shown in Fig. 1. Alanda micro watershed faced high water stress during the summer season. The villages accompanying the micro watershed rely on bore wells which were dried out. Farmers mainly depend on rain, groundwater and other sources of water for irrigation.

2. MATERIALS AND METHODS

Soil and water conservation measures/structures plans of the Alanda micro watershed were prepared using GIS, remote sensing and the AHP method. AHP is applied by creating a pairwise comparison matrix to assign weights to these factors based on their importance to water resources. These weights are used in a weighted overlay analysis in GIS, where thematic maps

(drainage density map, lineament density map, slope map, land use and land cover map, soil map, geology map, geomorphology map and rainfall map) were integrated and overlaid using ArcGIS software to identify groundwater potential zones for water resource development [11,12]. The thematic maps were created using satellite data SRTM and Landsat 8. The zones are categorized into high, moderate and low potential for water resource management based on their conditions. The largest area falls under moderate groundwater potential zones, indicating significant opportunities for soil and water conservation measures/structures plans. This could be instrumental in transforming these moderate zones into areas with high groundwater potential zones. The water resources management plan ensures judicious and effective use of water resources in the micro

watershed, enhancing productivity and mitigating drought. It identifies potential sites for surface water development and groundwater exploitation, reflecting a careful approach to sustainable resource use [13,14]. Implementing soil and water conservation measures/structures plan strategies improves moderate groundwater potential zones, increasing groundwater availability. This improvement supports crop sustainability, ultimately benefiting residents of the micro-watershed region. Surface water resources within the micro-watershed, including the drainage network, contour bunds, ponds water harvesting structures etc. were identified. Areas appropriate for groundwater development were also suggested. A detailed description of water resources management action through surface and groundwater development is provided below.

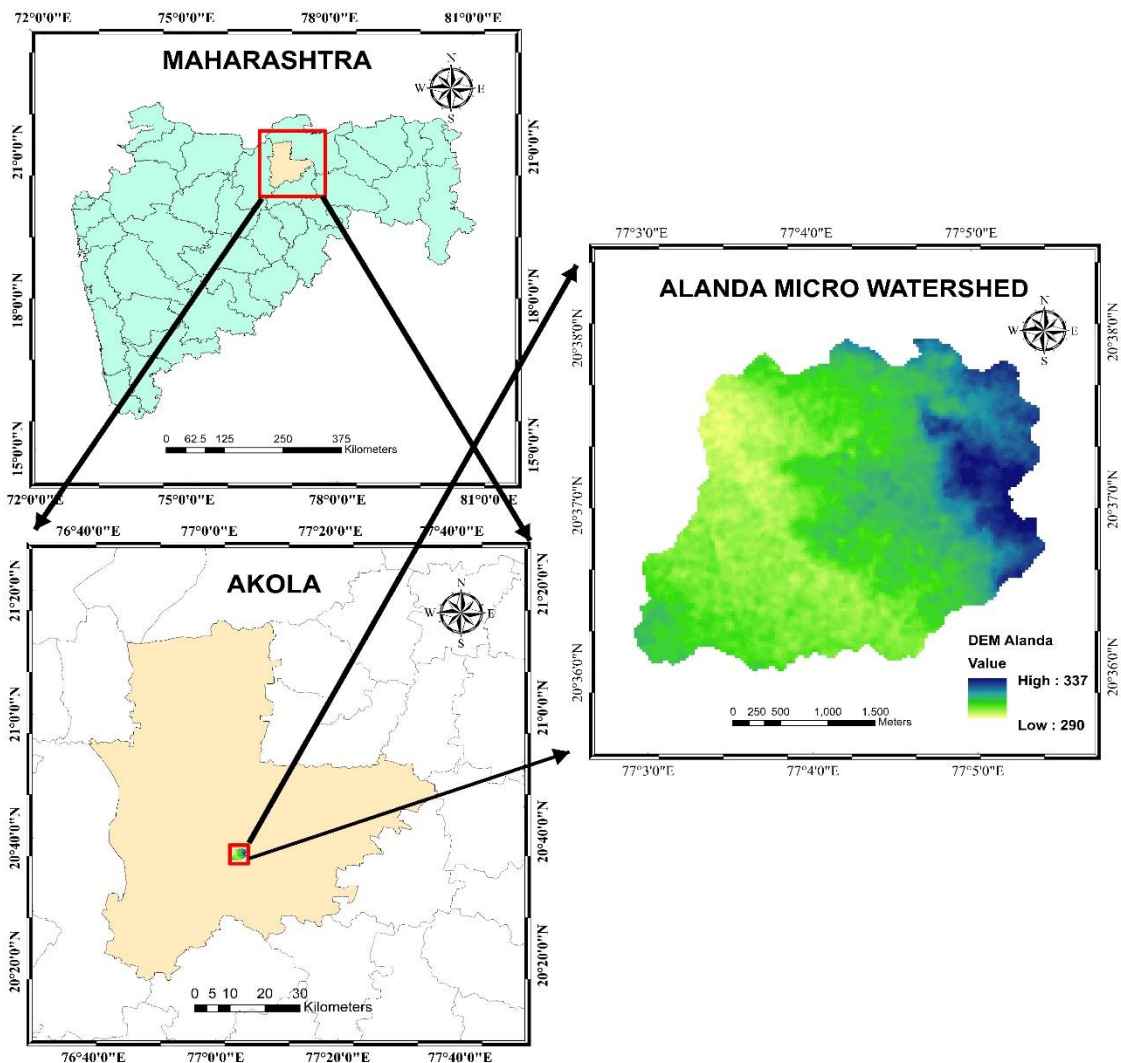


Fig. 1. Location map of the study area

Contour bund: Contour bund is a soil and water conservation technique used in agricultural lands to reduce soil erosion, enhance water infiltration and improve soil moisture. It involves constructing embankments along natural contour lines, which slow runoff, capture water and promote groundwater recharge. This method is particularly effective in areas with gentle slopes (0-6%) and low rainfall (below 700 mm). Typically, contour bunds are 0.3 to 0.6 meters high, 1 to 2 meters wide at the base and 0.3 to 0.5 meters wide at the top, with spacing of 10 to 30 meters depending on slope and soil type. It is highly effective in this region due to the presence of light soils and low rainfall, supporting rainfed crops by improving moisture retention.

Graded bunds: Graded bunds are soil and water conservation structures used on sloping agricultural lands to control runoff and reduce erosion. It is particularly useful in rainfed regions with substantial rainfall or limited infiltration, as it's slow runoff, enhances infiltration and protects topsoil. Proper surveying is required to determine appropriate gradients and spacing, typically 15 to 30 meters apart. Graded bunding is most effective on slopes between 2% and 6%.

Farm pond: A farm pond is a water harvesting structure for flat areas, providing irrigation for Kharif crops and supporting groundwater recharge. The pond's catchment area ranges from 2 to 25 hectares, with impermeable soil ensuring prolonged water storage. For each hectare needing irrigation, 1000 cubic meters of water storage (20 m x 20 m x 3.0 m) is required, with around 5% of the land allocated for the pond [15]. It helps capture rainwater, control soil erosion by reducing runoff and enhances groundwater recharge, improving water availability and raising the water table.

Contour trenches: Contour trenches are excavated along land contours to conserve soil and water, especially on slopes up to 15%. Typically measuring 0.3 m by 0.3 m, these trenches stabilize the land, retain moisture and promote vegetation growth. Trenches run level to capture rainwater, which then percolates into the soil, aiding groundwater recharge. Bunds made from excavated material reduce runoff and soil erosion. The construction starts from the ridge, placing topsoil upstream and boulders

downstream. This method improves soil moisture, supports vegetation and promotes sustainable land management.

Check dams: Check dams are small structures built across gentle-stream slopes to capture runoff and boost groundwater recharge. They are effective in both hard rock and alluvial areas, with heights usually under 2 meters. Proper site selection and placement of water cushions prevent erosion. These dams work best on lower-order streams with medium slopes and can manage catchment areas of about 25 hectares. Key construction factors include slope, soil cover and rock type, with nearby irrigation wells further aiding water management.

The decision rules are formalized for the selection of sites of various soil and water conservation structures as per the guidelines given by the Integrated Mission for Sustainable Development (IMSD), Indian National Committee on Hydrology and the criteria are presented in Table 1.

3. RESULTS AND DISCUSSION

The existing soil and water conservation measures/structures for the study area are presented in Fig. 2. The survey revealed the existence of 3 farm ponds, 1 check dam and a contour bund within a 96.79 ha area. Various thematic layers viz. slope, stream order, land use and land cover, drainage, soil texture and rainfall data were analyzed to identify sites appropriate for soil and water conservation measures/structures as depicted in Fig. 3. Suitable sites for 5 farm ponds and 4 check dams are suggested. It is also suggested to implement continuous contour trenches across a 9.69 ha area. Additionally, contour bunds are proposed for 206.45 ha and graded bunds for 66.48 ha, as detailed in Table 2. In addition, agronomic practices such as contour cultivation, strip cropping, intercropping, crop rotations and contour vegetative hedges are advised for agricultural lands. These agronomic measures are effective for land slopes up to 2 percent and in areas where erosion is not a serious issue. Geospatial techniques enable precise targeting of vulnerable areas for sustainable water harvesting. These findings guide long term, climate resilient water management strategies.

Table 1. Criteria for selection of different soil and water conservation measures and water harvesting structures

Sr. No.	Structure	Selection Criteria				
		Rainfall (mm)	Slope (%)	Soil Porosity	Runoff coefficient	Stream Order
1.	Contour bund	< 700	< 6	Low	Medium/high	-
2.	Graded bund	400-1200	2-6	Low	Low	-
3.	Farm pond	<500	0-5	Low	Medium/high	1 st
4.	Continuous contour trenches	400-1200	10-25	High	Medium/high	1 st
5.	Check dam	400-1200	< 15	Low	Medium/high	2 nd to 4 th

Table 2. Soil water conservation measures/structures in the Alanda micro watershed

Sr. No.	SWC Measures/Structures	Existing Nos/Area	New proposed Nos/Area
1.	Farm pond	3 nos	5 nos
2.	Check dam	1 nos	4 nos
3.	Continuous contour trenches	-	9.69 ha
4.	Contour bund	96.79 ha	206.45 ha
5.	Graded bund	-	66.48 ha

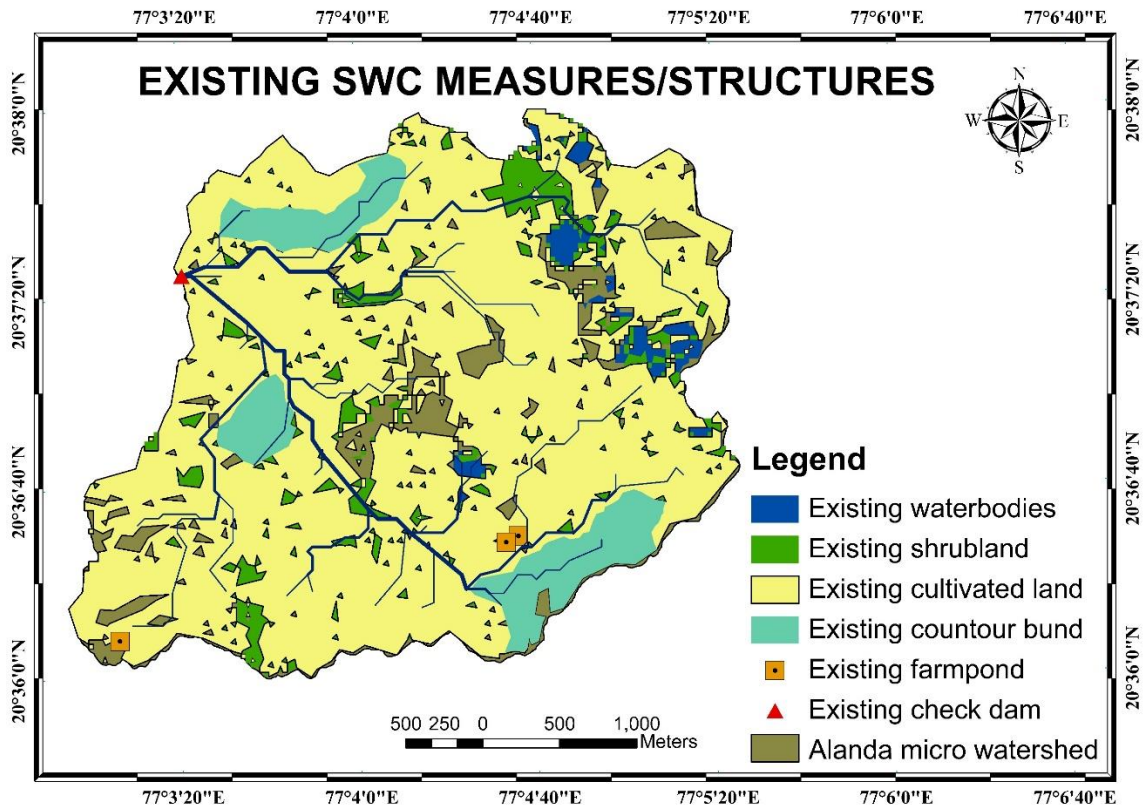


Fig. 2. Existing SWC measures/structures in Alanda micro watershed

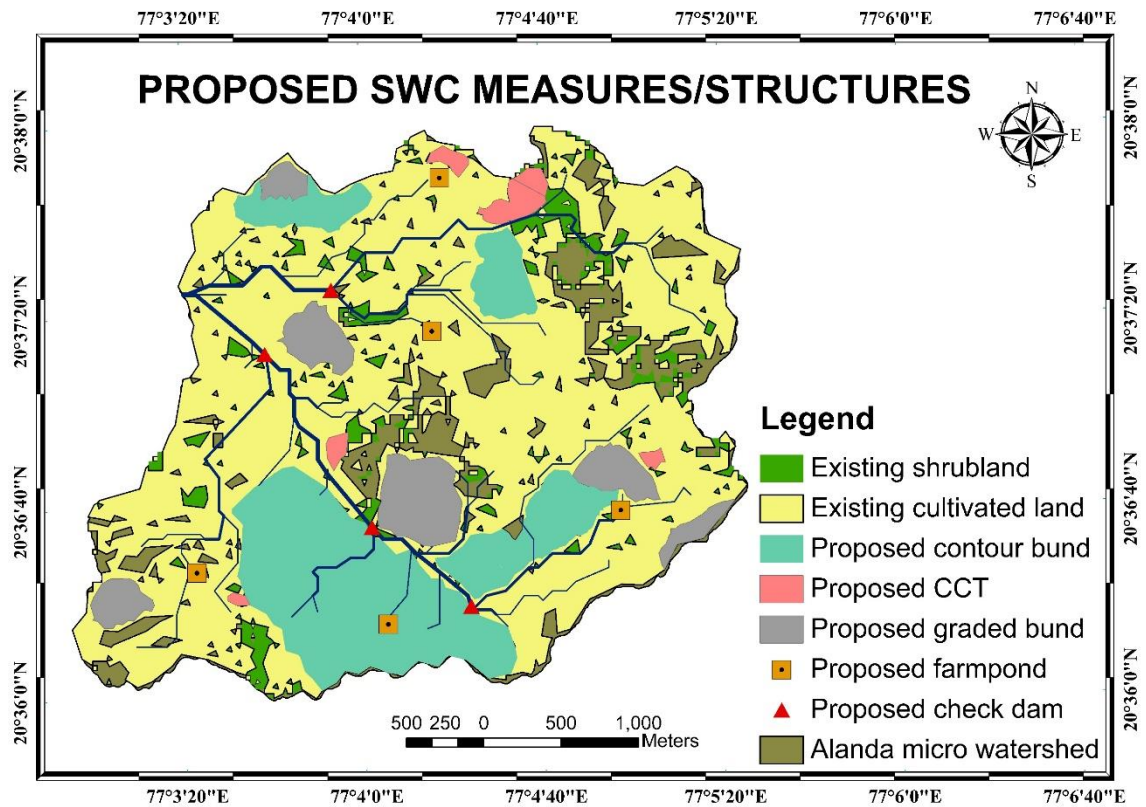


Fig. 3. Proposed SWC measures/structures in Alanda micro watershed

4. CONCLUSION

This study emphasizes the importance of GIS and remote sensing in assessing water resources and identifying key areas for conservation and groundwater recharge in the Alanda micro-watershed. It contributes to sustainable water management and supports achieving Sustainable Development Goals goals. At present, the study area has 3 farm ponds, 1 check dam and contour bund (96.79 ha) soil and water conservation measures/structures. There is scope to construct an additional 5 farm ponds, 4 check dams, contour bund (206.45 ha), graded bund (66.48 ha) and continuous contour trenches (9.69 ha) in this micro watershed. In this water resources development plan, the renovation of existing water bodies is proposed to increase water availability. Hence, there is a large scope to convert this moderate zone to a high groundwater potential zone in the study area.

DISCLAIMER (ARTIFICIAL INTELLIGENCE)

Author(s) hereby declare that NO generative AI technologies such as Large Language Models (ChatGPT, COPILOT, etc) and text-to-image generators have been used during writing or editing of this manuscript.

ACKNOWLEDGEMENTS

The authors are thankful to the Director and Principal Investigators, ICAR-CRIDA, Hyderabad, Government of India for their facilities and support under AICRP for Dryland Agriculture, Dr. Panjabrao Deshmukh Krishi Vidyapeeth, Akola.

COMPETING INTERESTS

Authors have declared that no competing interests exist.

REFERENCES

1. Agarwal E, Agarwal R, Garg RD, Garg PK. Delineation of groundwater potential zone: An AHP/ANP approach. *J. Earth Syst. Sci.* 2013;122:887–898.
2. Rangarajan R, Athavale RN. Annual replenishable ground water potential of India—An estimate based on injected tritium studies. *J. Hydrol.* 2000;234:38–53.
3. Goswami T, Ghosal S. Understanding the suitability of two MCDM techniques in mapping the groundwater potential zones of semi-arid Bankura District in eastern India. *Groundw. Sustain. Dev.* 2022;17:100727.
4. Chaudhary BS, Aggarwal S. Demarcation of palaeochannels and integrated ground water resources mapping in parts of Hisar district, Haryana. *Jour. Indian Soc. Remote Sensing.* 2009;37:251-260.
5. Dongardive MB, Patode RS, Nagdeve MB, Gabhane, VV, Pande, CB. Water resources planning for the micro watersheds using geospatial techniques. *Int J Chem Stud.* 2018;6(5):2950-2955.
6. Reddy KR, Patode RS. Assessment of groundwater quality - A case study of Kondapur Mandal, Medak district, Andhra Pradesh. *Current World Environment.* 2013;8(2):267.
7. Patode RS, Nagdeve MB, Ganvir MM, Gabhane VV. Evaluation of In-situ Moisture Conservation Practices for Sustainable Productivity of Major Crops in Vidarbha Region. *Int. J. Curr. Microbiol. App. Sci.* 2017; 6(10):261-268.
8. Ramya R, Nanthakumaran A, Senanayake IP. Identification of artificial groundwater recharge zones in Vavuniya district using remote sensing and GIS. *artificial groundwater recharge zones agri east.* 2019;13(1):44-55.
9. Suresha KJ, Taj H. Groundwater Investigation of Upper Kabini Watershed Using Remote Sensing and GIS Technique, HD Kote Taluk, Mysuru District. *J Remote Sens GIS.* 2019;8(265): 2.
10. Chorey AB, Gabhane VV, Patode RS, Ganvir MM, Tupe AR, Mali RS. Overview of Dryland Agriculture Research and Achievements in Western Vidarbha Zone of Maharashtra. *Indian Journal of Dryland Agricultural Research and Development.* 2022;37(2spl):139-148.
11. Rana MMSP, Moniruzzaman M. Potential Application of GIS and Remote Sensing to Evaluate Suitable Site for Livestock Production in Northwestern Part of Bangladesh. *Watershed Ecology and the Environment.* 2023;5. Available: <https://doi.org/10.1016/j.wsee.2023.07.001>
12. Rana MMSP, Hossain MA, Nasher NMR. Identification of groundwater

- potential zone using geospatial techniques of agriculture dominated area in Dinajpur district, Bangladesh. Environmental Challenges. 2022;7: 100475.
Available:<https://doi.org/10.1016/j.envc.2022.100475>
13. Patode RS, Nagdeve MB, Pande, CB. Groundwater level monitoring of Kajaleshwar-Warkhed watershed, Tq. Barshitakli, Dist. Akola, India through GIS approach. Advances in Life Sciences. 2016; 5(24).
 14. Reddy KR, Murthy RS, Patode RS. Thematic integration approach for watershed and land management. Indian Journal of Science and Technology. 2013;6(10):1-6.
 15. Patode RS, Pande CB, Nagdeve MB, Moharir KN, Wankhade RM. Planning of conservation measures for watershed management and development by using geospatial technology—A case study of Patur Watershed in Akola District of Maharashtra. Current World Environment. 2017;12(3):708.

Disclaimer/Publisher's Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of the publisher and/or the editor(s). This publisher and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.

© Copyright (2024): Author(s). The licensee is the journal publisher. This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Peer-review history:

The peer review history for this paper can be accessed here:

<https://www.sdiarticle5.com/review-history/123874>